



All-In-One Unit



Parking Management

All-In-One Unit is a piece of hardware that can be applied to entrances, exits & zone gates. Besides the core components of LPR unit, HD camera implanted with LPR algorithm and Mini-cloud software, LED/LCD display, floodlights, controller, it also includes a barrier. Such a extremely compact design allows you to have a much slimmer layout of Entry/Exit/Zone, plus, deployed along with Mini-cloud platform, All-In-One Unit can be nearly Plug & Play, then, you will enjoy a significant saving of installing cost.

LCD Display


- High brightness LCD display
- License plate display
- Payment message display

Barrier

- Open and close speed (2~5s)
- Boom Length (1~5m)
- Folding arm supported

LPR Camera

- 2 M pixels
- 1920 * 1080 Resolution
- H.264/H.265/MJPEG Video Format
- Loop, Video Trigger Mode
- Port:RJ45 10/100Mbps*1 RS485*1
- I/O : Input * 4 Output * 2
- Illumination: 0.01 Lux
- Capture Rate: ≥99.9%

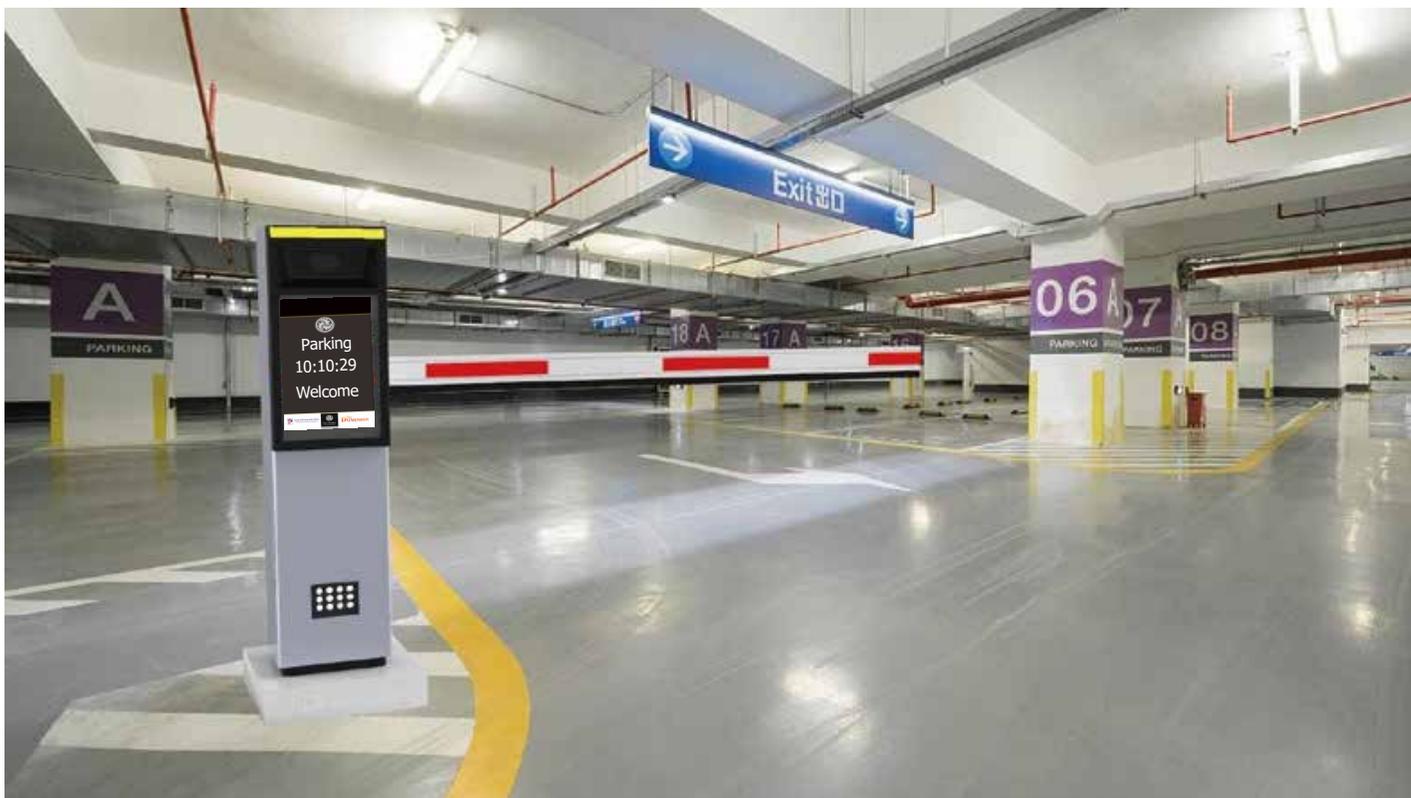

Parameter

Rated Voltage:	220 VAC 50 Hz
Power Consumption:	300 W
Communication:	TCP/IP
Installation:	Ground
Material:	Steel
Temperature:	-20 ~ 70 °C
Humidity:	30% ~ 80% No condensation
Color:	Black RAL 9017
	Silver RAL 9007

